

## 0.7-2.7GHz/100Watt/Module

**Model Number: KB0727M50A**

The model KB0727M50A is a multi-octave high power amplifier operating between 0.7 GHz and 2.7GHz and offering a wide dynamic Range with 100 Watts typical saturated power. The employment of gallium nitride (GaN) and chip-and-wire technology in manufacturing ensures this module state-of-the-art power performance with excellent power-to-volume ratio. It is ideal for jamming, EMC, test and measurement applications.

**FEATURES:**

- Small Size and Light Weight
- Broadband & High Power
- 50 Ohms Input and Output Matched
- Built-In Control and Protection

**ELECTRICAL SPECIFICATIONS @ +28.0VDC, 25°C, 50Ω**

Parameter	Symbol	Min	Typ	Max	Units
Operating Frequency	BW	700		2700	MHz
RF Output Power @P <sub>SAT</sub>	P <sub>SAT</sub>		100		Watt
Power Gain	G <sub>p</sub>		50		dB
Power Gain Flatness	Δ G <sub>p</sub>		±2.5		dB
Input Return Loss	S <sub>11</sub>			-10	dB
Harmonics @60W	H		-10	-8	dBc
Spurious Signals	Spur		-60		dBc
In/Output Impedance	Impedance		50		Ω
Operating Voltage	V <sub>DC</sub>	24	28	32	Volt
DC Current @80W	I <sub>DD</sub>		13		Amp
Switching Time @1kHz TTL	Ton/off		2	5	uS

**MECHANICAL SPECIFICATIONS**

Parameter	Value	Units	Notes
Dimensions	180x90x25 [7.08x3.54x0.98]	mm [inch]	Maximum
Weight	1.2 [2.64]	kg [lbs]	Maximum
RF Connectors Input	SMA, Female		
RF Connectors Output	SMA, Female		
DC Interface Connector	D-Sub 9-Pin, Male		
Cooling	External Heatsink Required (Not Supplied)		

**ENVIRONMENTAL CHARACTERISTICS (Design to Meet)**

Parameter	Minimum	Typical	Maximum	Units	Notes
Operating Temperature	-40		60	°C	
Non-operating Temperature	-45		85	°C	Storage
Relative Humidity (non-condensing)			95	%	

**ABSOLUTE MAXIMUM RATING**

Input RF drive level without damage	+10 dBm (Max)
Load VSWR @ P <sub>OUT</sub> =70W	∞ @ all load phase & amplitude for duration of 1 minute; 3:1 @ all load phase & amplitude continuous.
Over Temperature	85°C @ heatsink [restored @ 60°C]

### Focus on Your Application

\*Chengdu KeyLink Wireless Technology Co., Ltd.\*

>> 5-2, Huidu Headquarters Park, High-Tech(West) Zone, Chengdu, 611731, P. R. China

>> Phone: +86(28)87870761

>> Fax: +86(28)87883266

>> Email: sales@keylinkmw.com

>> www.keylinkmw.com

Specifications subject to change without notice


**0.7-2.7GHz/100Watt/Module**

Model Number: *KB0727M50A*

**DC INTERFACE CONNECTOR**

Pin #	Description	Specifications
1	VDD	28VDC
2	VDD	28VDC
3	VDD	28VDC
4	ENABLE	Amplifier Enable: TTL Logic High (3.3V) (Internally Pulled-Low)
5	CURRENT MONITOR	Analog voltage relative to IDD @ 50mV per Ampere
6	GND	Ground
7	GND	Ground
8	GND	Ground
9	TEMP MONITOR	Analog voltage relative to Module's Temperature @ 10 mV/°C

**OUTLINE DRAWING (All dimensions in mm [inch])**

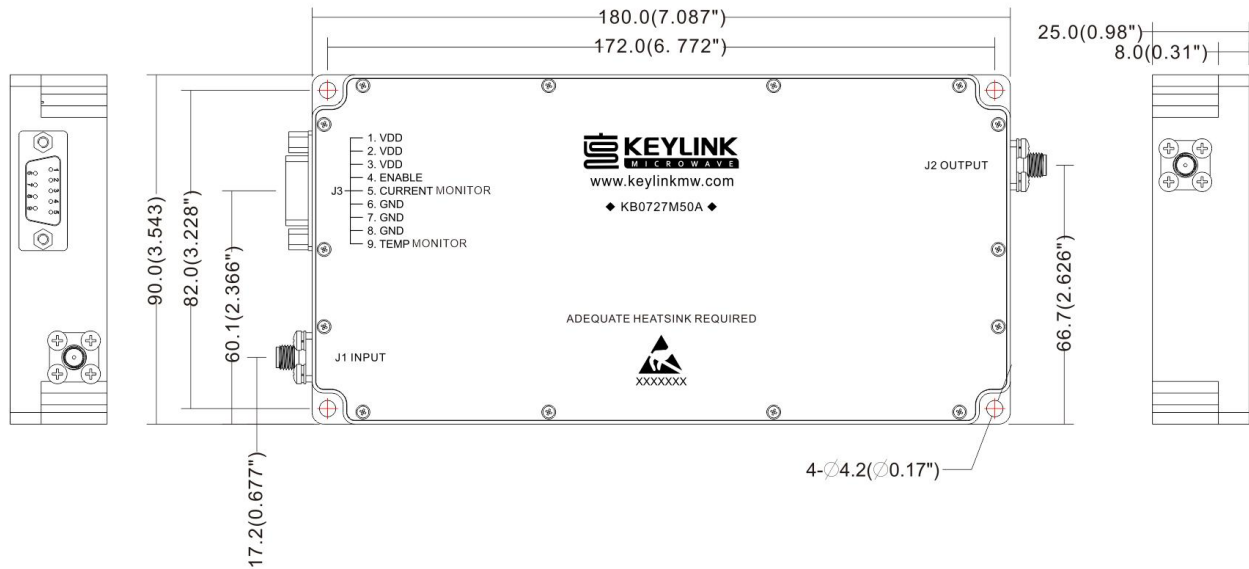

*Focus on Your Application*

**\*Chengdu KeyLink Wireless Technology Co., Ltd.\***

>> 5-2, Huidu Headquarters Park, High-Tech(West) Zone, Chengdu, 611731, P. R. China

>> Phone: +86(28)87870761

>> Fax: +86(28)87883266

>> Email: sales@keylinkmw.com


>> www.keylinkmw.com

Specifications subject to change without notice

**0.7-2.7GHz/100Watt/Module**

Model Number: KB0727M50A

TYPICAL PERFORMANCE PLOTS (FOR REFERENCE ONLY)

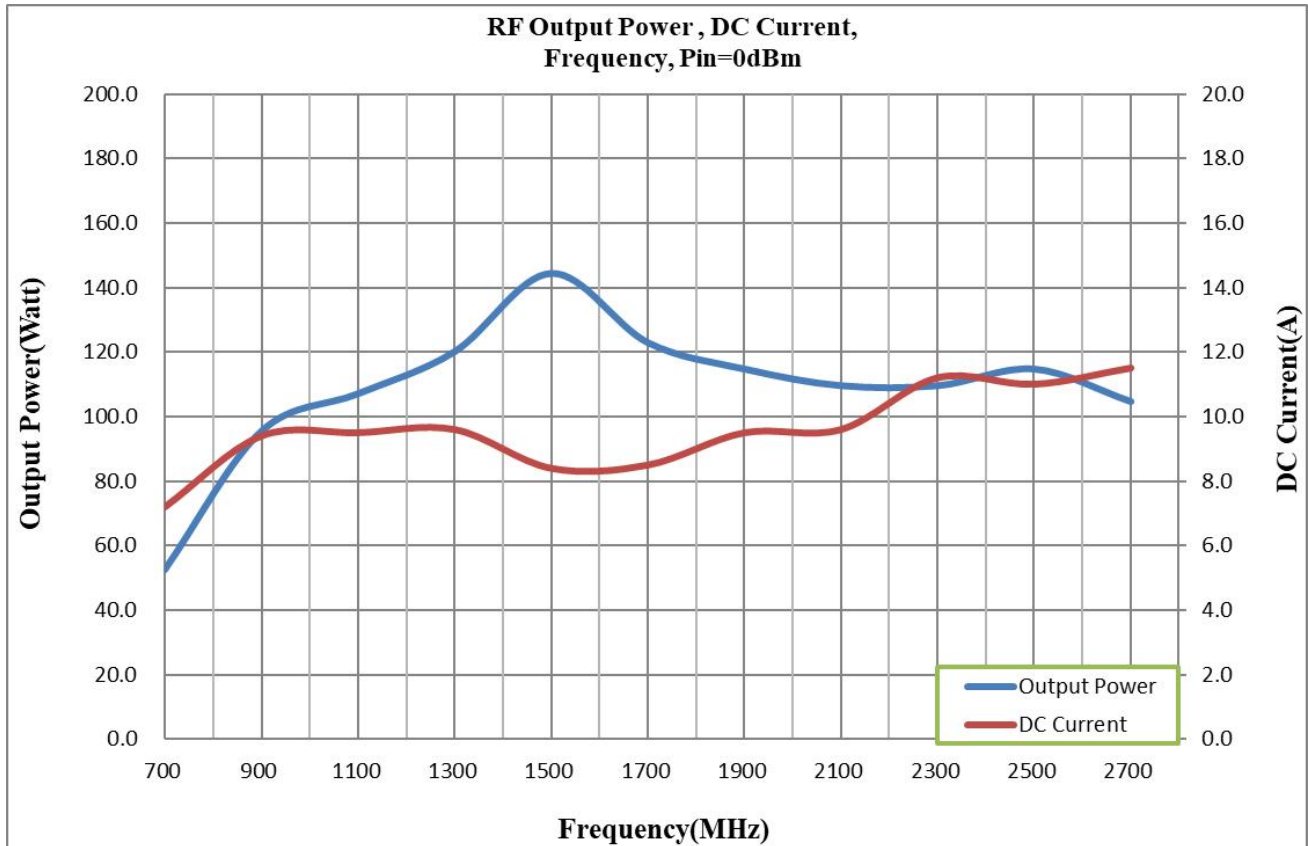

Note: Adequate heatsink required.

*Focus on Your Application*

\*Chengdu KeyLink Wireless Technology Co., Ltd.\*

>> 5-2, Huidu Headquarters Park, High-Tech(West) Zone, Chengdu, 611731, P. R. China

>> Phone: +86(28)87870761

>> Fax: +86(28)87883266

>> Email: sales@keylinkmw.com

>> www.keylinkmw.com

Specifications subject to change without notice