

20-520MHz/200Watt/Module

Model Number: KB002052M53A

The model KB002052M53A is a multi-octave high power amplifier operating between 20 MHz and 520 MHz and offering a wide dynamic Range with 200 Watts typical saturated power. The employment of advanced high power devices in manufacturing ensures this module exceptional power performance, long term reliability and high efficiency. It is ideal for broadband high power RF, UHF linear applications.

FEATURES:

- Broadband & High power
- High Efficiency
- Great Linearity
- Small Size & Light Weight
- Low Distortion

ELECTRICAL SPECIFICATIONS @ +32.0VDC, 25°C, 50Ω

Parameter	Symbol	Min	Typ	Max	Units
Operating Frequency	BW	20		520	MHz
RF Output Power	Pout		200		Watt
Power Gain	Gp		53		dB
Power Gain Flatness	ΔGp		±2		dB
Small Signal Flatness	Δ G _{ss}		±1.5		dB
Input Return Loss	S11			-10	dB
Harmonics @100W	H		-10		dBc
Spurious Signals	Spur		-50		dBc
Switch On/Off@10-90% Time	TON/OFF		2	5	μs
In/Output Impedance	Impedance		50		Ω
Operating Voltage	VDC	26	32	34	Volt
DC Current @200W	IDD		20		Amp

MECHANICAL SPECIFICATIONS

Parameter	Value	Units	Notes
Dimensions	180x150x25[7.1x5.9x1]	mm [inch]	Maximum
Weight	1.5[3.3]	kg [lbs]	Maximum
RF Connectors Input	SMA, Female		
RF Connectors Output	N, Female		
DC Interface Connector	Hybrid, D-Sub 7-Pin, Male		
Cooling	External Heat sink Required (Not Supplied)		

ENVIRONMENTAL CHARACTERISTICS (Design to Meet)

Parameter	Minimum	Typical	Maximum	Units	Notes
Operating Temperature	-40		60	°C	
Non-operating Temperature	-45		85	°C	Storage
Relative Humidity (non-condensing)			95	%	

ABSOLUTE MAXIMUM RATING

Input RF drive level without damage	+10 dBm (Max)
Load VSWR @ POUT =100W	∞ @ all load phase & amplitude for duration of 1 minutes; 3:1 @ all load phase & amplitude continuous
Over Temperature	85°C @ heatsink [restored @ 60°C]

Focus on Your Application

Chengdu KeyLink Wireless Technology Co., Ltd.

>> 5-2, Huidu Headquarters Park, High-Tech(West) Zone, Chengdu, 611731, P. R. China

>> Phone: +86(28)87870761*8708 >> Fax: +86(28)87883266

>> Email: sales@keylinkmw.com >> www.keylinkmw.com

Specifications subject to change without notice


20-520MHz/200Watt/Module

Model Number: KB002052M53A

DC INTERFACE CONNECTOR

Pin #	Description	Specifications
A1	VDD	32VDC
A2	GND	Ground
1	ENABLE	Amplifier Enable: TTL Logic High (3.3V) (Internally Pulled-Low)
2	CURRENT SENSE	Analog voltage relative to IDD @ 100mV per Ampere
3	TEMP SENSE	Analog voltage relative to Module's Temperature @ 10 mV/°C
4	GND	Ground
5	NC	No electrical connection

OUTLINE DRAWING (All dimensions in mm [inch])

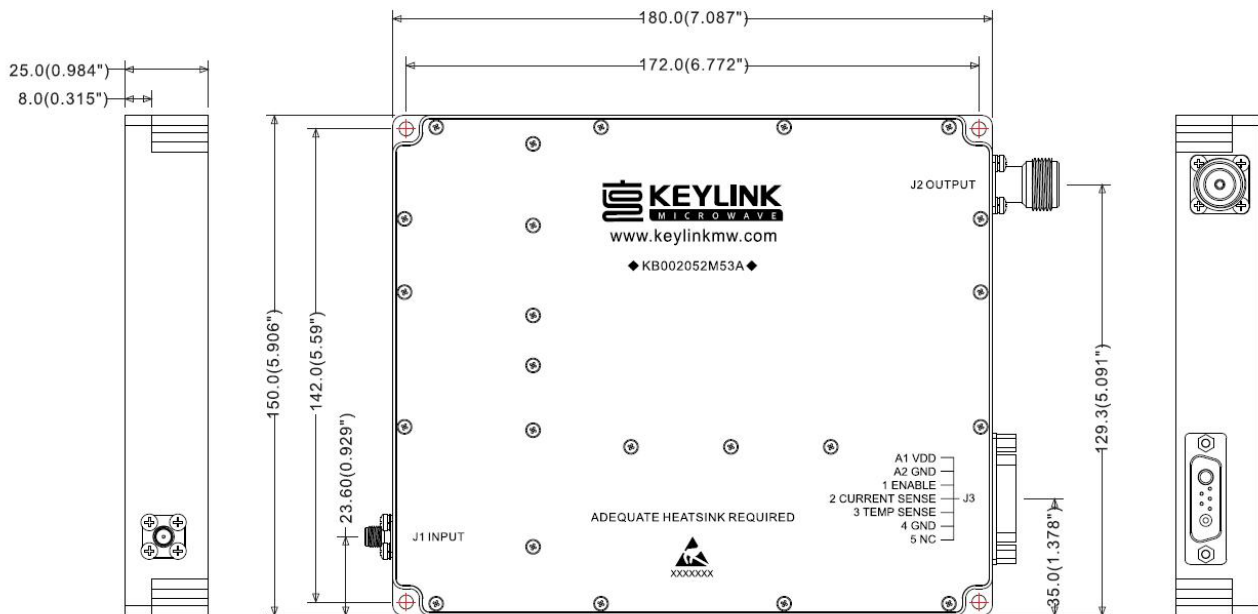

Focus on Your Application

Chengdu KeyLink Wireless Technology Co., Ltd.

>> 5-2, Huidu Headquarters Park, High-Tech(West) Zone, Chengdu, 611731, P. R. China

>> Phone: +86(28)87870761*8708 >> Fax: +86(28)87883266

>> Email: sales@keylinkmw.com >> www.keylinkmw.com


Specifications subject to change without notice

20-520MHz/200Watt/Module


Model Number: KB002052M53A

TYPICAL PERFORMANCE PLOTS (for reference)

Graph1: Output Power (Low temp. $-10\pm 3^{\circ}\text{C}$)

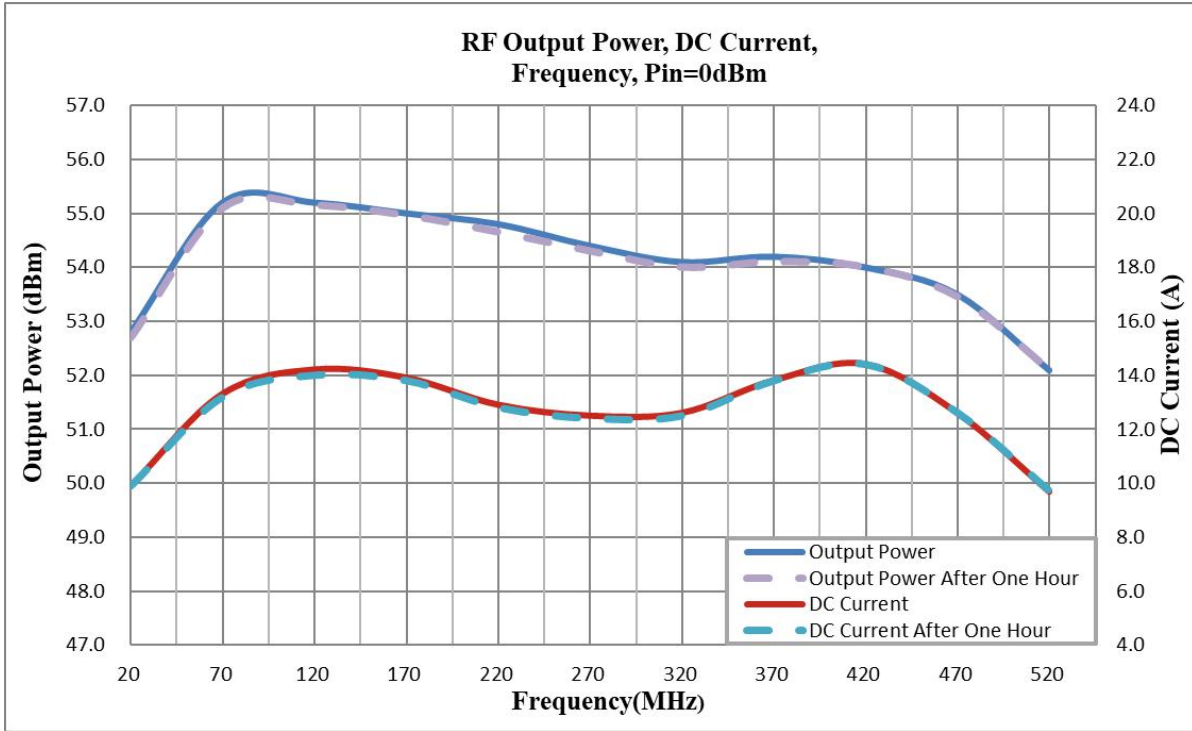

Graph2: Output Power (High temp. $+40\pm 3^{\circ}\text{C}$)

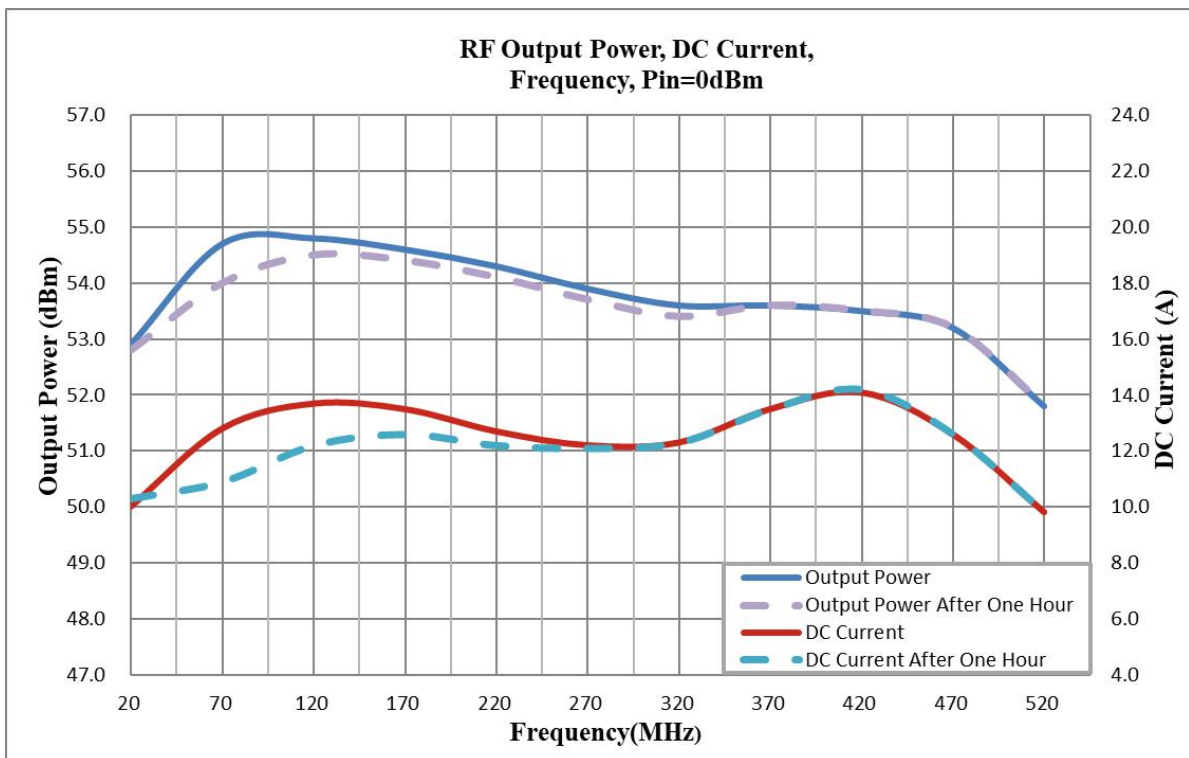

Focus on Your Application

Chengdu KeyLink Wireless Technology Co., Ltd.

>> 5-2, Huidu Headquarters Park, High-Tech(West) Zone, Chengdu, 611731, P. R. China

>> Phone: +86(28)87870761*8708 >> Fax: +86(28)87883266


>> Email: sales@keylinkmw.com >> www.keylinkmw.com

Specifications subject to change without notice


20-520MHz/200Watt/Module

Model Number: KB002052M53A

Graph3: Output Power (Normal temp. +25±3 °C)

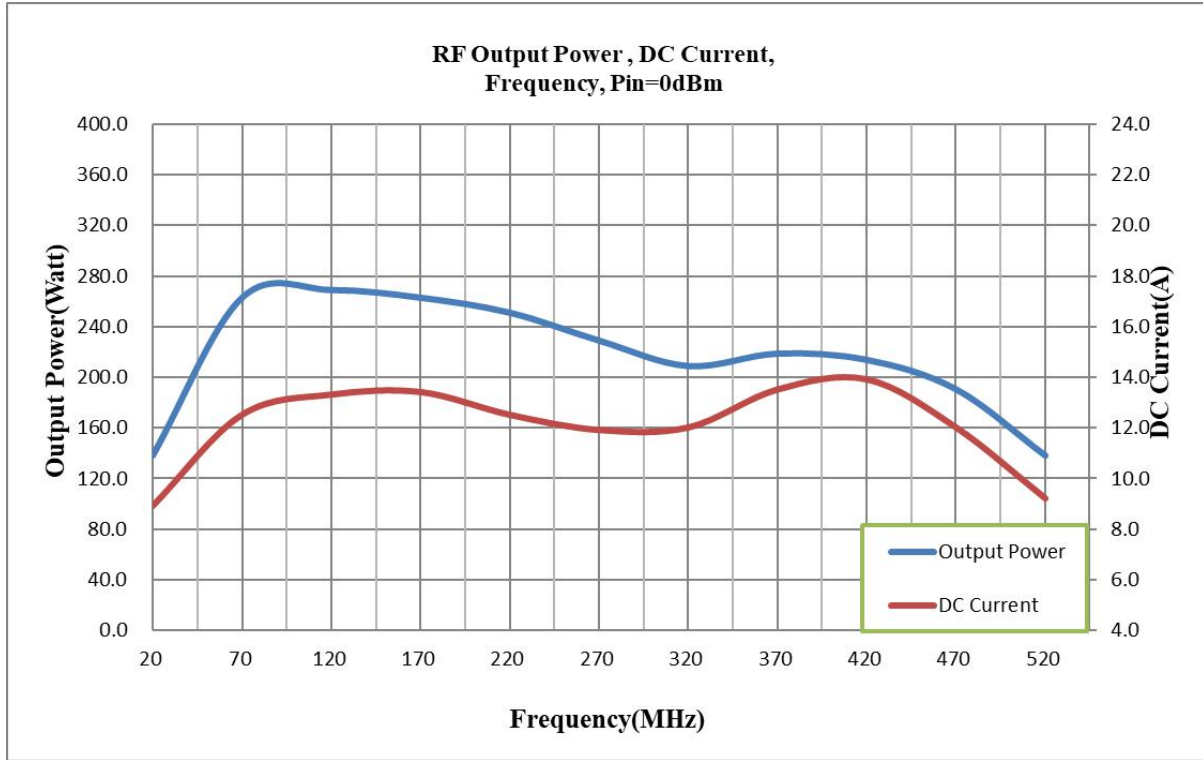

Power Gain:

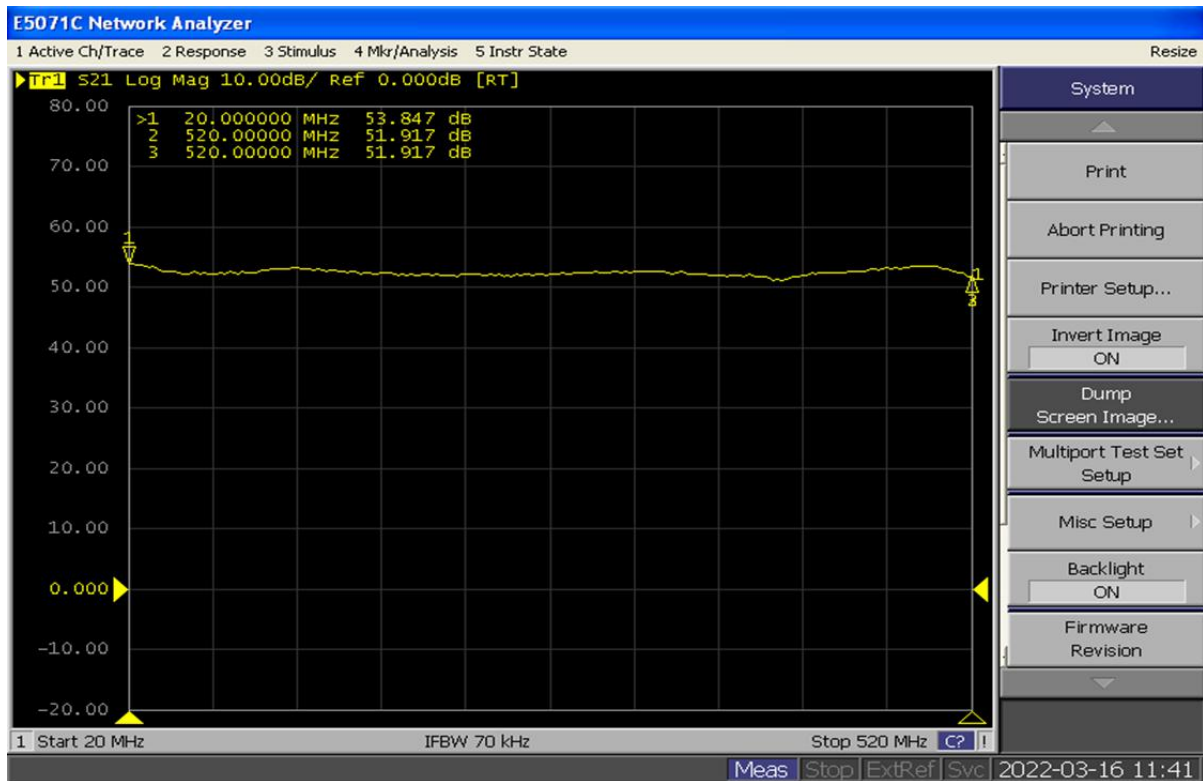

Focus on Your Application

Chengdu KeyLink Wireless Technology Co., Ltd.

>> 5-2, Huidu Headquarters Park, High-Tech(West) Zone, Chengdu, 611731, P. R. China

>> Phone: +86(28)87870761*8708 >> Fax: +86(28)87883266


>> Email: sales@keylinkmw.com >> www.keylinkmw.com

Specifications subject to change without notice

20-520MHz/200Watt/Module

Model Number: KB002052M53A

Input Return Loss:

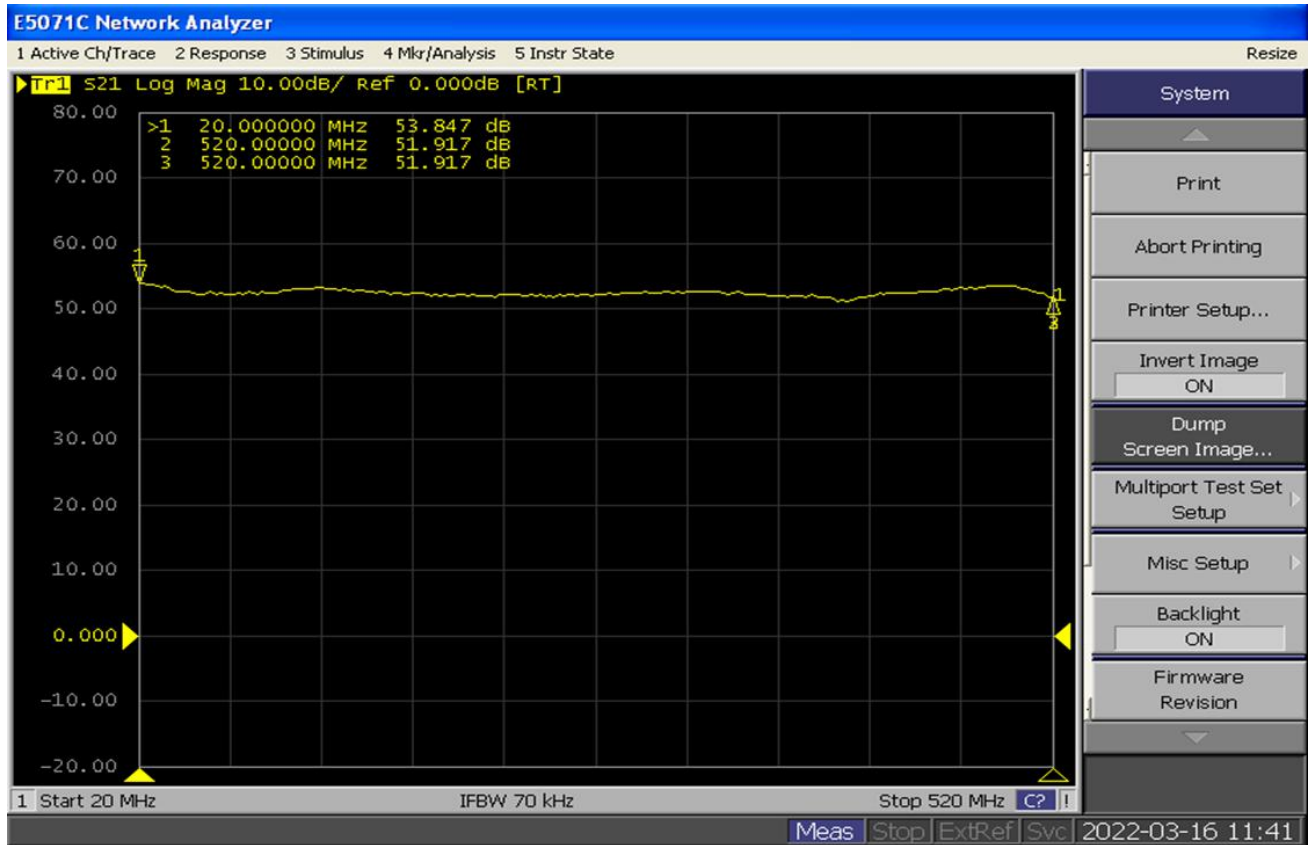

Note: Adequate heatsink required.

Focus on Your Application

Chengdu KeyLink Wireless Technology Co., Ltd.

>> 5-2, Huidu Headquarters Park, High-Tech(West) Zone, Chengdu, 611731, P. R. China

>> Phone: +86(28)87870761*8708 >> Fax: +86(28)87883266

>> Email: sales@keylinkmw.com >> www.keylinkmw.com

Specifications subject to change without notice